

New door control in detail.

Information about GEZE ActiveStop.

Areas of application

Door type	wooden interior doors, rebated and closing flush doors
Leaf weight	optimal operation up to 45 kg
Leaf width	optimal operation up to 1,100 mm
Leaf thickness	from 38 mm
Door hinge	for DIN left and DIN right
Installation type	concealed
Rebate	ca. 5 mm clearance in handle area

Product characteristics



Door damping and closing	closing direction – Starting from ca. 25° opening direction – Starting from ca. 60°
Free swing area	freely selectable door position – between 25° and 60°
Door opening angle	continuously adjustable – between 80° and 140°
Secured final position	safe holding of the door in the open position, no doorstop needed
Damping strength	can be set using a valve
Protection against overload	with integrated safety valve
Door latch block	included in delivery, use according to customer wishes or door use
Standard colour	fine silver RAL available at an additional cost
Low-maintenance	designed for maintenance-free operation in private room doors

Ordering information


Suppliers	hardware dealers or pre-assembled door leaves and frames from specialist door dealers
Order number	163411 (ready-to-install complete set in fine silver)
Scope of delivery	ActiveStop, slide rail with slide block and end buffer, connection handle, universal door latch block, installation material




Focus Open 2015
Silver

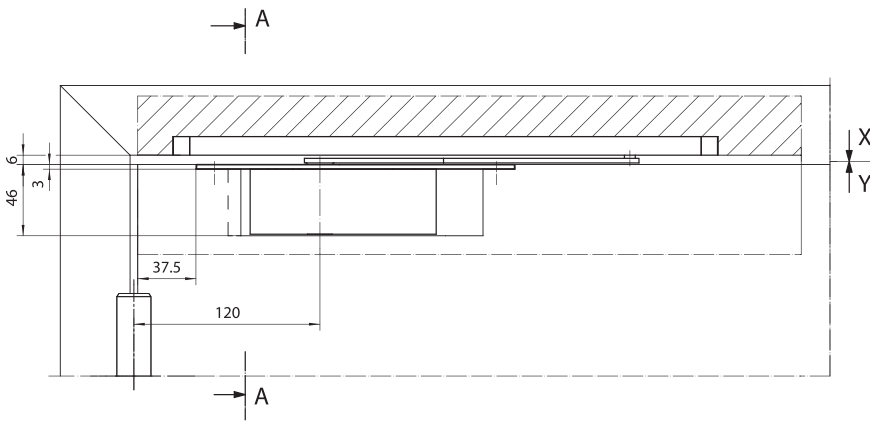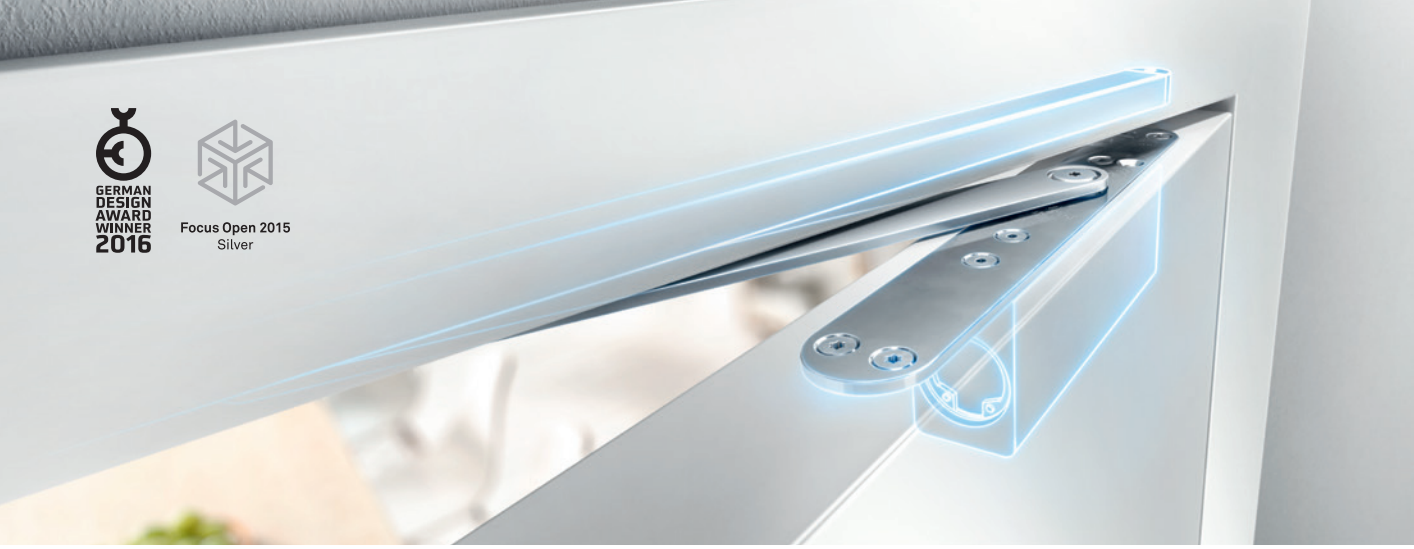


Longitudinal section

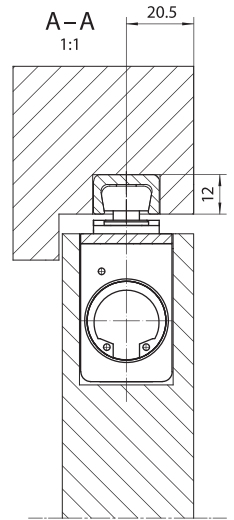

Cross-section

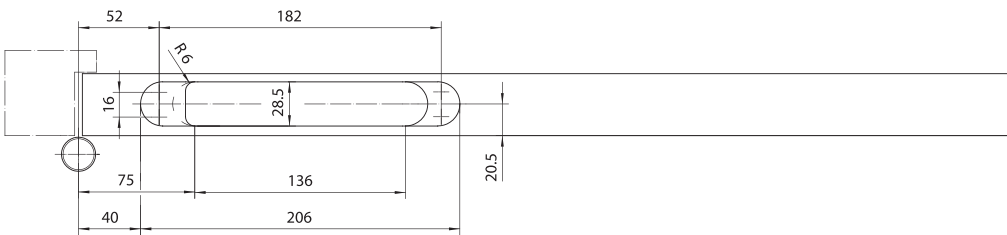

Door leaf finish

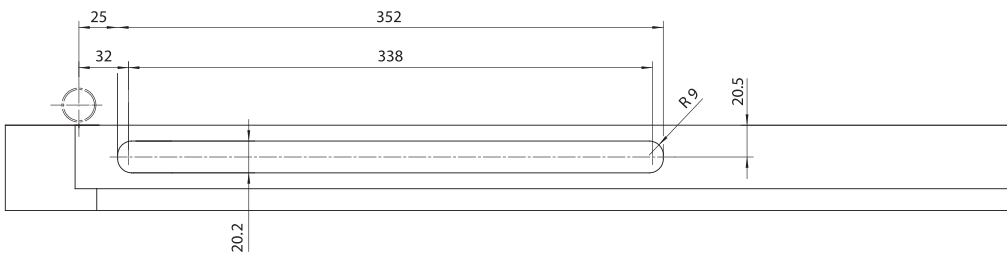

Door frame finish